




## INSTRUCTION MANUAL UNIVERSAL CORD DIMMER 210X-SERIE

The Tradim universal cord dimmer is protected with a switchable fuse (No. 1 in the figure) of the Fast type with a value of 1.6A (F1.6A).

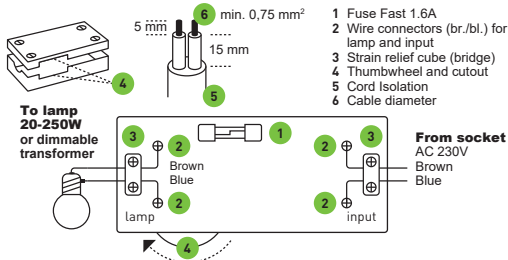

### CONNECT UNIVERSAL CORD DIMMER:

- Unplug the lamp from the wall socket
- Strip the wires (cable diameter 0.75mm<sup>2</sup> minimum, see Nr. 5 and 6 in the figure) for both the lamp side and the input side (Nr. 2 in the figure)
- Unscrew the dimmer and remove the inner part (print) from the housing
- Insert the split brown and blue wires through the terminal block (Nr. 2 in the figure) and tighten the screws securely
- Unscrew the screws of the strain relief (Nr. 3 in the figure) and remove it from the housing
- Place the interior, including cords, back into the housing and make sure the cutouts in the cover fit around the thumbwheel (nr. 4 in the figure)
- Replace the strain reliefs (Nr. 3 in the figure), clamp the cords on both sides securely under both strain reliefs and tighten the strain relief screws (Nr. 3 in the figure) securely
- Place the cover back on the housing and tighten the cover screws

### TECHNICAL DATA TRADIM UNIVERSAL CORD DIMMER

- Power range 20-250W/VA, 230V AC/50Hz/IP40. In off mode max. 0.5W power consumption
- Suitable for dimming incandescent and halogen lamps (up to 250W) or dimmable lamps in combination with dimmable transformer (max. 200W)
- The ε on the housing indicates that there is still voltage on the lamp in the off position (> OFF)!
- Use the led wire dimmer indoors at a temperature between 0-40°C
- Use in non-condensing areas with relative humidity between 10% and 90%.
- The manufacturer is not liable for damage caused by incorrect use or improper installation of the dimmer
- The warranty period is 2 years from the date of purchase, to be proven by your receipt

### NECESSITIES FOR CONNECTING THE UNIVERSAL CORD DIMMER:

- Small Phillips screwdriver • Small screwdriver (voltage detector) • Wire Stripper

The manufacturer and/or supplier is not liable for damage caused by improper use or installation of the dimmer. The warranty period is 2 years from the date of purchase, to be proven at the retailer by means of your purchase receipt.

Version EN 1.1 (18/2/22). Keep this manual for (re-)installation!

TRADIM Aalsbergen 9, 6942 SE Didam Netherlands [www.tradim.nl](http://www.tradim.nl)